


**Anbotek Compliance Laboratory Limited**

**Voltage Mains FCC PART 15 CLASS B**

EUT: XXXX N/M:XXXX  
 Manufacturer: XXXX  
 Operating Condition: FULL LOAD  
 Test Site: 1# Shielded Room  
 Operator: Bevan Zhang  
 Test Specification: AC 110V/60Hz  
 Comment: N  
 Temp.=22.2 Hum.=55%

**SCAN TABLE: "Voltage(150K~30M)FIN"**

Short Description: 150K-30M Disturbance Voltages

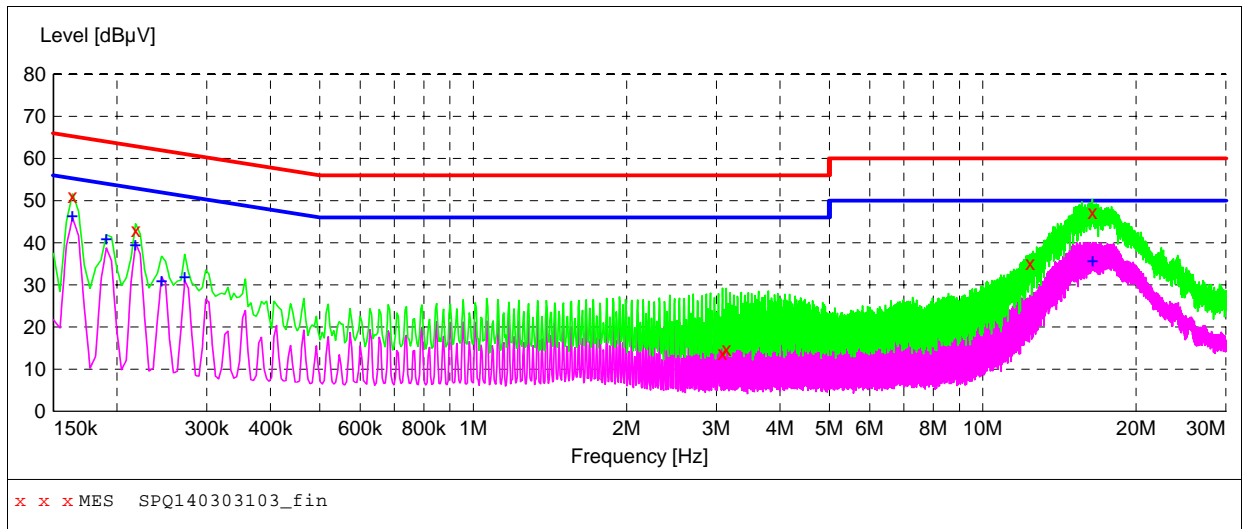

**MEASUREMENT RESULT: "SPQ140303103\_fin"**

3/3/2014 10:42AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.163500	51.00	20.1	65	14.3	QP	N	GND
0.217500	43.10	20.1	63	19.8	QP	N	GND
3.083500	13.80	20.4	56	42.2	QP	N	GND
3.137500	14.80	20.4	56	41.2	QP	N	GND
12.380500	35.10	20.7	60	24.9	QP	N	GND
16.421500	47.30	20.7	60	12.7	QP	N	GND

**MEASUREMENT RESULT: "SPQ140303103\_fin2"**

3/3/2014 10:42AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.163500	46.50	20.1	55	8.8	AV	N	GND
0.190500	41.10	20.1	54	12.9	AV	N	GND
0.217500	39.70	20.1	53	13.2	AV	N	GND
0.244500	31.10	20.1	52	20.8	AV	N	GND
0.271500	32.10	20.1	51	19.0	AV	N	GND
16.439500	35.90	20.7	50	14.1	AV	N	GND